



P550-dy P550-dy-CV	Specifications		
	P550-dy	P550-dy-CV	
D Detergent pump	P550-dy-D	P550-dy-CV-D	
P Drain pump with filter	P550-dy-P	P550-dy-CV-P	
CV Steam condenser	P550-dy-D-P	P550-dy-CV-D-P	
DIMENSIONS l x w x h	685x755x2055	685x755x2220	mm
WASHING CAPACITY baskets/H	30/20/15	30/20/15	Nr.
WASH CYCLE	2'-3'-4'	2'-3'-4'	Min.
BASKET SIZE	520x580	520x580	mm
WORK HEIGHT	865	865	mm
DAYLIGHT	840	840	mm
VOLTAGE	400 V3/N-50Hz	400 V3/N-50Hz	V
WASHING PUMP	1100	1100	W
RINSING PUMP	385	385	W
WASH TANK ELEMENTS (electric)	3000	6000	W
RINSE TANK ELEMENTS (electric)	6000	6000	W
TOTAL RATING (electric)	7100	7100	W
MAX CURRENT INTENSITY	12	12	A
TANK CAPACITY	40	40	Lt
BOILER CAPACITY	8	8	Lt
WATER CONNECTION	50 ÷ 55	12 ÷ 15	°C
CYCLE WATER CONSUMPTION	3,5	3,5	l
HOUR WATER CONSUMPTION	90-60-45	90-60-45	l
WATER PRESSURE	2 ÷ 4	2 ÷ 4	Bar
RINSING WATER TEMPERATURE	80 ÷ 90	80 ÷ 90	°C
WATER INLET	3/4"	3/4"	"G
WATER OUTLET	1 1/4"	1 1/4"	"G
NET WEIGHT	165	190	kg
GROSS WEIGHT	184	220	kg
NOISE	<70	<70	dB(A)
AUTODRAINING WASHING PUMP	✓	✓	


Options			
DAD-P	COD. 0500055	PERISTALTIC DETERGENT PUMP	
DAD-R	COD. 0500062	ADJUSTABLE FLOW RATE DETERGENT PUMP	
DG-LP	COD. AC00693	DOUBLE SLIDE GUIDE	
BP	COD. AC00100	ADDITIONAL UNIT FOR COLD WATER INLET	
ITL-5	COD. AC00057	5 BAKING-PAN INSERT - H20 MM	
ITL-4	COD. AC00058	4 BAKING-PAN INSERT - H40 MM	
IIP	COD. AC00074	FUNNEL RACK	
ITP4	COD. CC00148	4 BAKING-PAN RACK - 600X800XH20	
IBP5	COD. CC00149	INSERT 520X580MM	

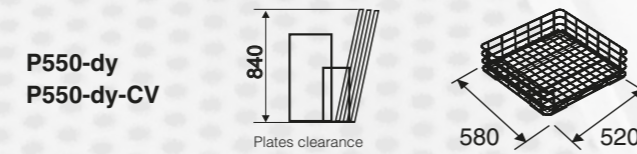

### P550-dy

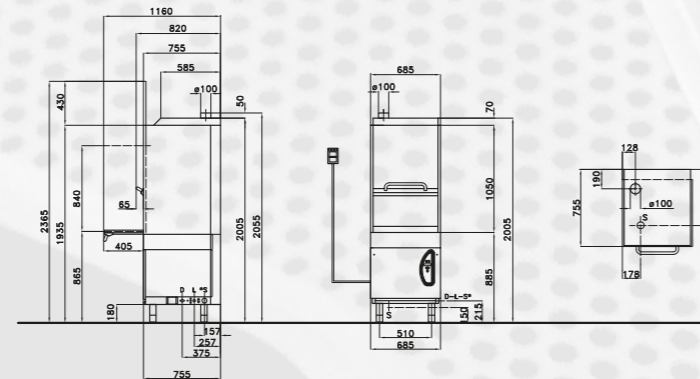

### P550-dy-CV

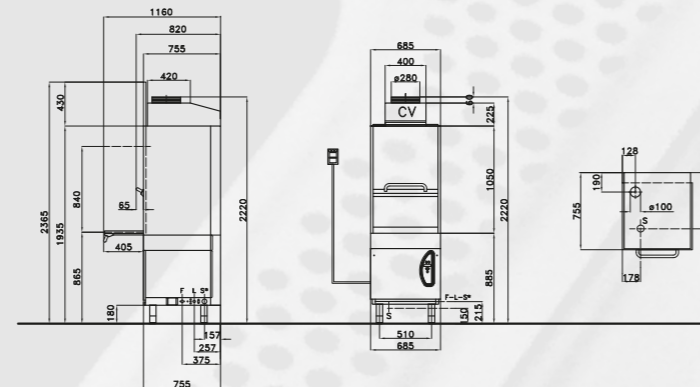

The manufacturer reserves the right to make modifications of materials and models without warning.

## WARE-WASHING MACHINE

P550-dy  
P550-dy-CV

HOST 2015  
**SMART LABEL**

Lamber got the **SMART LABEL 2015** award for technological innovation



# P550-dy P550-dy-CV

## Ware-washing machine

- Ware-washing machine Volt 400/3N/50Hz
- Stainless steel construction 18/10 AISI 304
- New control panel with interactive graphic display with description of washing steps
- Wash and rinse temperatures electronic display
- Complete programming of all the washing parameters
- Cycle counter
- Service maintenance function
- Double insulated wall
- Double counterbalanced door
- Self-cleaning tank with slanting bottom
- Stainless steel wash and rinse arms
- Rotating lower and upper wash
- Rotating lower and upper rinse
- Stainless steel wash pump
- Incorporated booster pump
- Integral tank drawer filters
- Security thermostat for Tank and Boiler elements
- Door opening safety device
- Rinse aid dispenser
- Frontal control panel
- Certifications: CE


### WARE-WASHING MACHINE

Extractable tank filter in stainless steel construction

Drawn tank with rounded edges and slanting bottom for the highest hygiene

S.S. drawn washing and rising arms, designed to guarantee the best washing efficacy

The clearance of 840mm allows to wash utensils and pans with big dimensions.



The wash pump with S.S. body and S.S. impeller guarantees high reliability and efficacy. The immediate accessibility to the components simplifies servicing operations



## Control panel with interactive graphic display

### P550-dy

- Interactive graphic display with description of washing cycles.
- 39 washing parameters with complete programming of them.
- Programming of the timing of rinse-aid pumps and detergent pump.
- Wash and rinse temperature display.
- Cycle counter, Self-washing.
- Disinfection cycle, Washing Thermocontrol.
- Automatic OFF, Cycle repetition.
- Total and partial water change (versions with drain pump).
- Service maintenance function.



### AVAILABLE ALSO WITH STEAM CONDENSER CV

The steam condenser allows to improve the environments' wholesomeness and most of all to recover heat to make your pot-washer more efficient. You economize because it's not necessary to feed the machine with hot water. The pot-washer is fed with cold water.

### P550-dy-CV



The extractable upper filter allows to maintain the system's efficiency unaltered in the time



### Accessories

- 1 S.S. generic basket, 520x580 mm.
- 1 S.S. insert for 3 pans.



### STEAM CONDENSER CV Advantages of the new system

**YOU ECONOMIZE BECAUSE IT'S NOT NECESSARY TO FEED THE DISHWASHER WITH HOT WATER.**



The dishwasher is fed with cold water, so to allow immediately a first consumption saving.

**YOU ECONOMIZE IMMEDIATELY 9kW!**



The boiler's heating element is only 6kW, instead of the 15kW usually required to obtain the same performances in case of cold water feed (-50% of electric energy consumption!).

**YOU RECOVER 20°C!**



Hot air and steams, that are sucked by the upper pipe coil, give their heat to the water that flows inside the pipes, increasing this way the water's temperature of 20°C.

**YOU WORK IN HEALTHIER ENVIRONMENTS!**



On opening the door at the end of every washing cycle, the steam emission that usually assails the user is completely eliminated.

**AN EXTRA EXTRACTION SYSTEM IS NOT NECESSARY!**



Steam emission is completely eliminated! The additional cost for a connection to a ventilation/extraction system in the dishwashing area is this way avoided.